


TECHNICAL DATA SHEET

Grade 100 Alloy Lifting Chain

Alloy lifting chain for assembling Grade 100 chain slings. Select chain and compatible fittings by size, capacity and lifting arrangement.

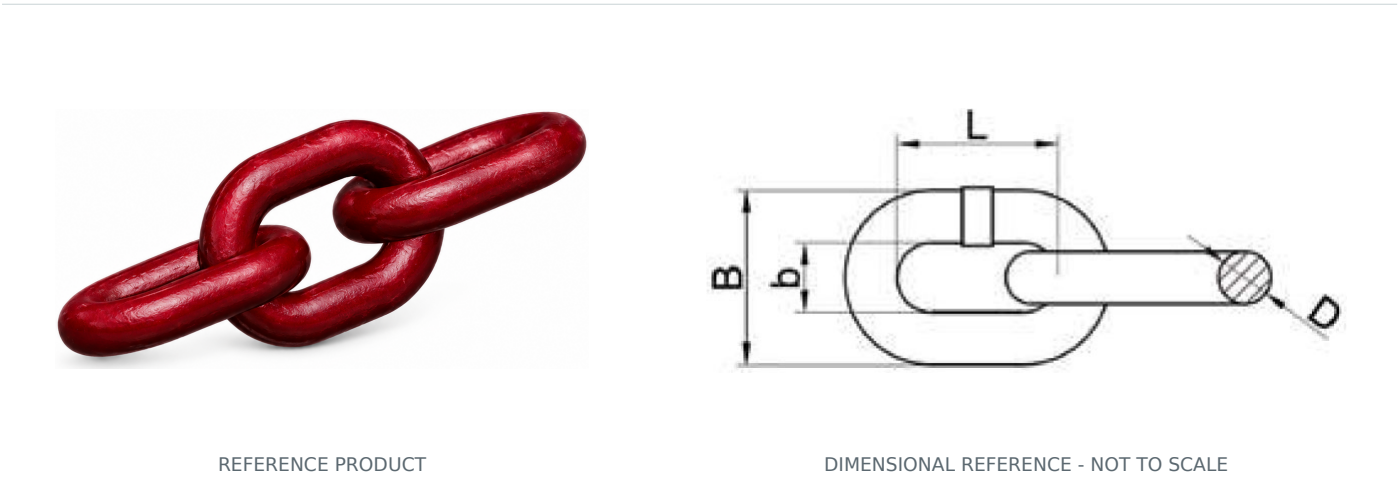

PRODUCT CLASS	REFERENCE SAFETY FACTOR	SOURCE STANDARD
Grade 100	4:1	AS 2321

CAPACITY & DIMENSIONS

Safespear item code	Size (mm)	WLL (t)	Pitch (L) (mm)	External width (B) (mm)	Internal width (b) (mm)	Wt. (kg/m)
SS-G100-CHAIN-06	6	1.4	18.0	21.0	9.0	0.859
SS-G100-CHAIN-08	8	2.5	24.0	27.5	11.5	1.491
SS-G100-CHAIN-10	10	4.0	30.0	34.5	14.5	2.309
SS-G100-CHAIN-13	13	6.7	39.0	45.0	19.0	3.871
SS-G100-CHAIN-16	16	10.0	48.0	55.5	23.5	5.717
SS-G100-CHAIN-20	20	16.0	60.0	68.0	28.0	8.822
SS-G100-CHAIN-22	22	19.0	66.0	73.5	29.5	10.391

Dimensions in mm; WLL in tonnes. Product image and drawing are reference illustrations.
Representative red finish. Confirm supplied finish, certification and assembly rating.
Source-based specification; confirm the supplied product before selection. See reference register.