


TECHNICAL DATA SHEET

Grade 100 Master Link Multi

Master link assemblies with two intermediate links for multi-leg lifting assemblies. Match the master link, chain size and sling configuration.



REFERENCE PRODUCT

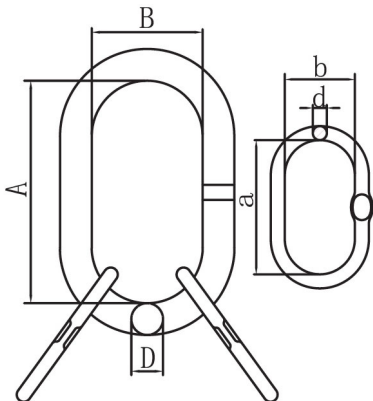

DIMENSIONAL REFERENCE - NOT TO SCALE

PRODUCT CLASS	REFERENCE SAFETY FACTOR	SOURCE STANDARD
Grade 100	4:1	AS 3776

CAPACITY & DIMENSIONS

Safespear item code	Size (mm)	WLL (t)	A (mm)	B (mm)	D (mm)	a (mm)	b (mm)	d (mm)	Wt. (kg)
SS-G100-MLA-06	6	3	135	75	19	54	25	13	1.3
SS-G100-MLA-08	8	5.3	160	90	23	70	34	16.5	2.33
SS-G100-MLA-10	10	8	180	100	27	85	40	19	3.7
SS-G100-MLA-13	13	14	200	110	33	115	50	23	6.5
SS-G100-MLA-16	16	21.2	260	140	36	140	65	27	10.1
SS-G100-MLA-20	20	33.6	350	190	50	180	90	33	22.8
SS-G100-MLA-22	22	39.9	350	190	50	180	100	36	26
SS-G100-MLA-26	26	56	400	200	60	180	100	45	42.6
SS-G100-MLA-32	32	85	460	250	72	200	110	50	66.7

Dimensions in mm; WLL in tonnes. Product image and drawing are reference illustrations.
Representative red finish. Confirm supplied finish, certification and assembly rating.
Source-based specification; confirm the supplied product before selection. See reference register.