


TECHNICAL DATA SHEET

Grade 100 Master Link

Oblong master links for connecting lifting assemblies to a crane hook. The table lists the referenced single-leg and two-leg chain sizes.



REFERENCE PRODUCT

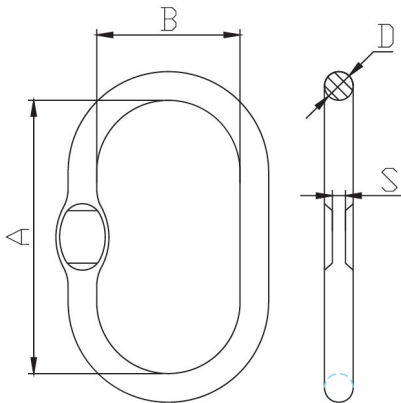

DIMENSIONAL REFERENCE - NOT TO SCALE

PRODUCT CLASS	REFERENCE SAFETY FACTOR	SOURCE STANDARD
Grade 100	4:1	AS 3776

CAPACITY & DIMENSIONS

Safespear item code	Chain 1 leg (mm)	Chain 2 leg (mm)	WLL (t)	A (mm)	B (mm)	D (mm)	S (mm)	Wt. (kg)
SS-G100-ML-0806	8	6	2.5	120	70	13	7	0.4
SS-G100-ML-1008	10	8	4.3*	140	80	17	8	0.7
SS-G100-ML-1310	13	10	7.5	160	95	22	11	1.5
SS-G100-ML-1613	16	13	12.5	180	100	27	14	2.51
SS-G100-ML-2016	20	16	17.3*	240	140	32	17	5.1
SS-G100-ML-2220	22	20	27.7*	250	150	38	21	7.2
SS-G100-ML-2622	26	22	32.9*	250	150	41	23	8.3
SS-G100-ML-3226	32	26	45.8	300	180	50	27	14.84
SS-G100-ML-3232	32	32	69.2	400	200	60	-	27.01

* WLL differs between source website and PDF. PDF figure shown; confirmation required.
Representative red finish. Confirm supplied finish, certification and assembly rating.
Source-based specification; confirm the supplied product before selection. See reference register.